

PRODUCT DETAILS










APPLICATIOS



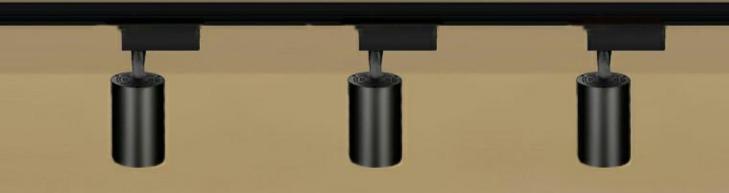


3000K

NETURAL WHITE

4000K

COOL WHITE

6000K

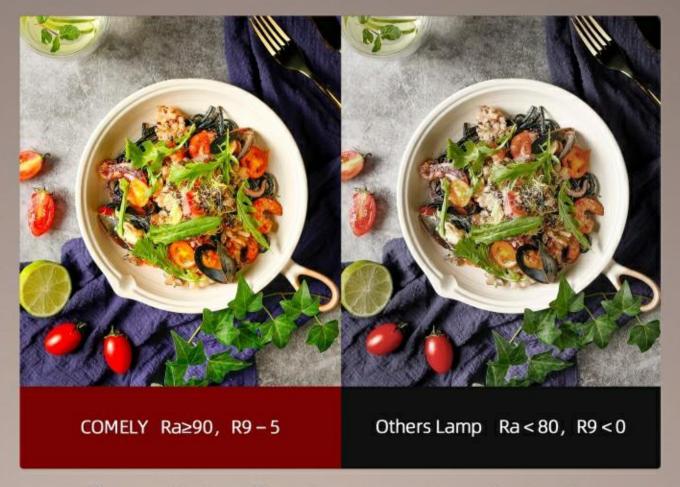

Different light effect between Comely & others



Installation procedure:

- 1. Turn off the switch;
- 2. Drill holes in the ceiling and install four-line guide rails;
- 3. The guide rail is connected to 100-240V mains;
- 4. Install the guide lamp on the guide rail;
- 5. After checking, turn on the switch and use it

